**Caratteristiche:**

Griglie pedonabili a barre fisse orizzontali con luce 12,5 mm per pavimenti galleggianti.

Costruzione:

Alluminio anodizzato.

Impiego:

A pavimento, in mandata o ripresa.

Fissaggio:

- Fissaggio con viti.

Accessori:

- Cestino raccogli-polvere.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.
- Controtelaio di montaggio in lamiera di acciaio zincato or extruded aluminium.

Characteristics:

Floor grilles composed of horizontal fixed bars with 12,5 mm of gap.

Construction:

Anodized aluminium.

Utilization:

For floor installation and for air intake or delivery.

Fixing:

- Fixing by using screws.

Accessories:

- Dust collection container.
- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet or extruded aluminium.

PREZZI / PRICES

	GRP GRPI	GRPS GRPSI	SC	CS	CT acciaio/steel	CTAP alluminio/aluminium
BxH mm	€	€	€	€	€	€
300x100	-	-	-	-	-	-
400x100	-	-	-	-	-	-
500x100	-	-	-	-	-	-
*600x100	-	-	-	-	-	-
800x100	-	-	-	-	-	-
1000x100	-	-	-	-	-	-
300x150	-	-	-	-	-	-
400x150	-	-	-	-	-	-
500x150	-	-	-	-	-	-
*600x150	-	-	-	-	-	-
800x150	-	-	-	-	-	-
1000x150	-	-	-	-	-	-
400x200	-	-	-	-	-	-
500x200	-	-	-	-	-	-
*600x200	-	-	-	-	-	-
800x200	-	-	-	-	-	-
1000x200	-	-	-	-	-	-
500x300	-	-	-	-	-	-
*600x300	-	-	-	-	-	-
800x300	-	-	-	-	-	-
1000x300	-	-	-	-	-	-
*600x400	-	-	-	-	-	-
800x400	-	-	-	-	-	-
1000x400	-	-	-	-	-	-
*600x500	-	-	-	-	-	-
800x500	-	-	-	-	-	-
1000x500	-	-	-	-	-	-
*600x600	-	-	-	-	-	-
800x600	-	-	-	-	-	-
1000x600	-	-	-	-	-	-

N.B.: GRPI e GRPSI prezzi a richiesta

N.B.: GRPI and GRPSI prices on request

DESCRIZIONI:

GRP: Griglia pedonabile standard
 GRPS: Griglia pedonabile a spessore regolabile da 30 a 50 mm
 GRPI: Griglia pedonabile ad alette inclinate a 20°
 GRPSI: Griglia pedonabile ad alette inclinate a 20° a spessore regolabile da 30 a 50mm

ACCESSORI:

SC: Serranda di taratura ad alette con movimento contapposto
 CS: Cestello raccogli-polvere
 CT: Controtelaio di fissaggio in lamiera d'acciaio zincata
 CTA: Controtelaio di fissaggio in alluminio


DESCRIPTIONS:

GRP: Standard floor grille
 GRPS: Floor grille with variable thickness from 30 to 50 mm
 GRPI: Floor grille with 20° deflection
 GRPSI: Floor grille with 20° deflection with variable thickness from 30 to 50 mm

ACCESSORIES:

SC: Opposed blade damper
 CS: Dust collection container
 CT: Counterframes in galvanised steel sheet profile section
 CTA: Counterframes in aluminium

DISEGNI / DRAWINGS

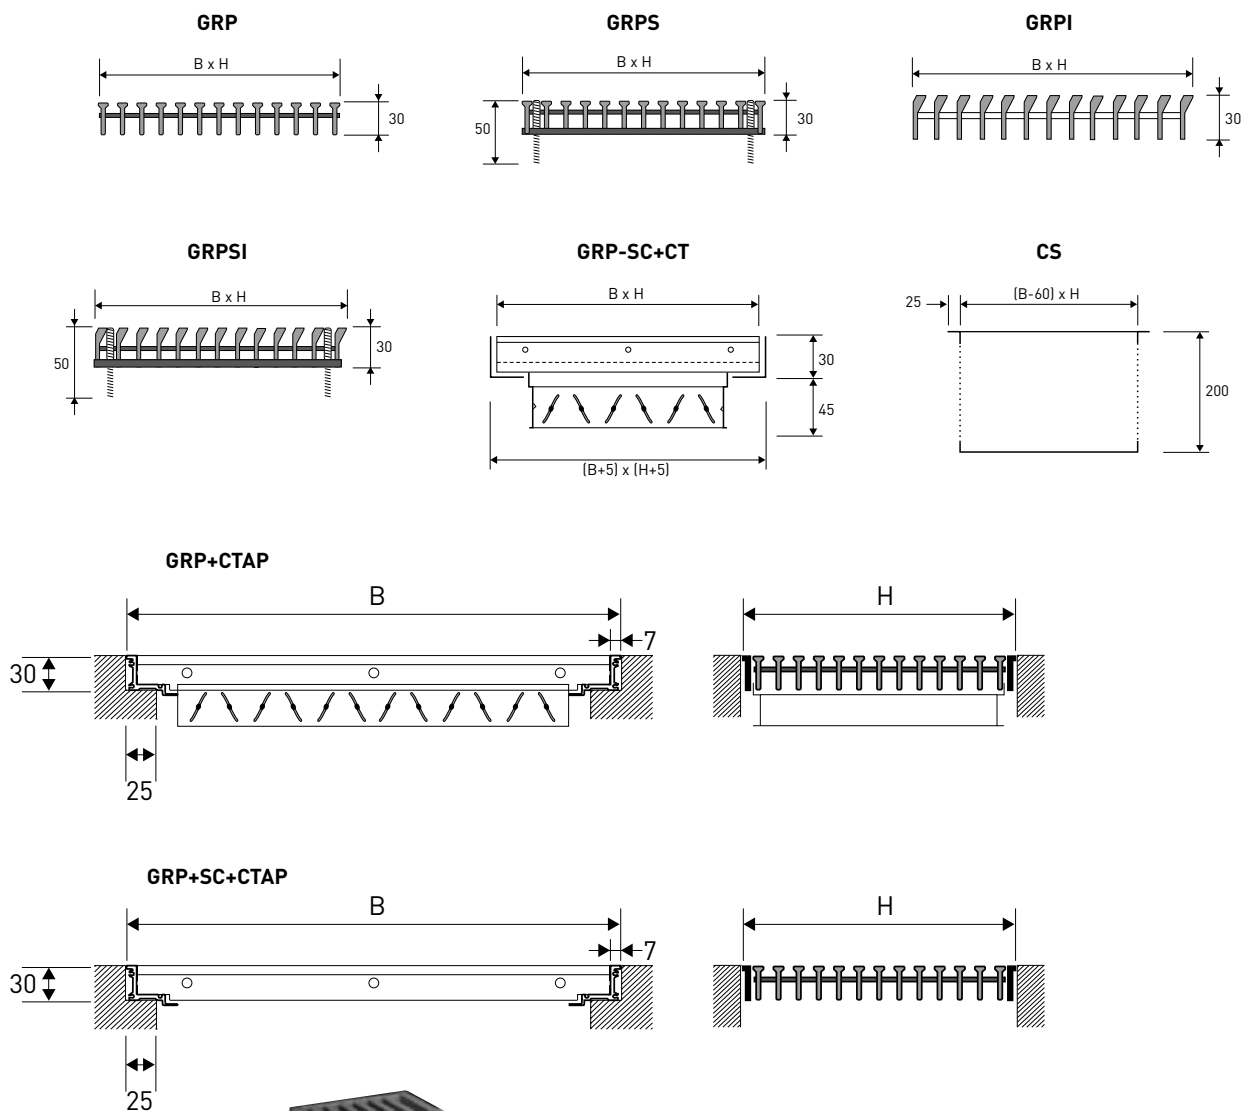

 BxH mm	Carico pedonabile uniformemente distribuito Kg. Maximum weight Kg.
600x150	150
600x200	200
600x300	300
600x600	500

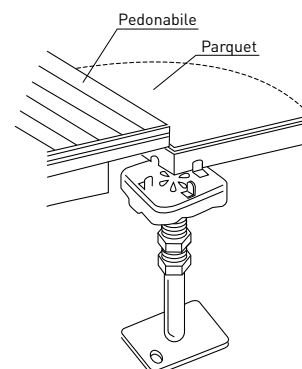
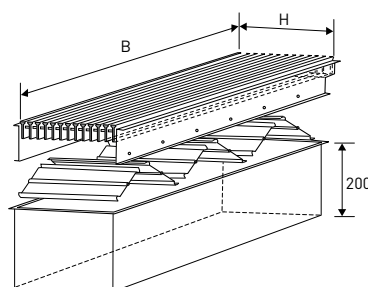


DIAGRAMMA SCELTA RAPIDA / QUICK SELECTION DIAGRAM

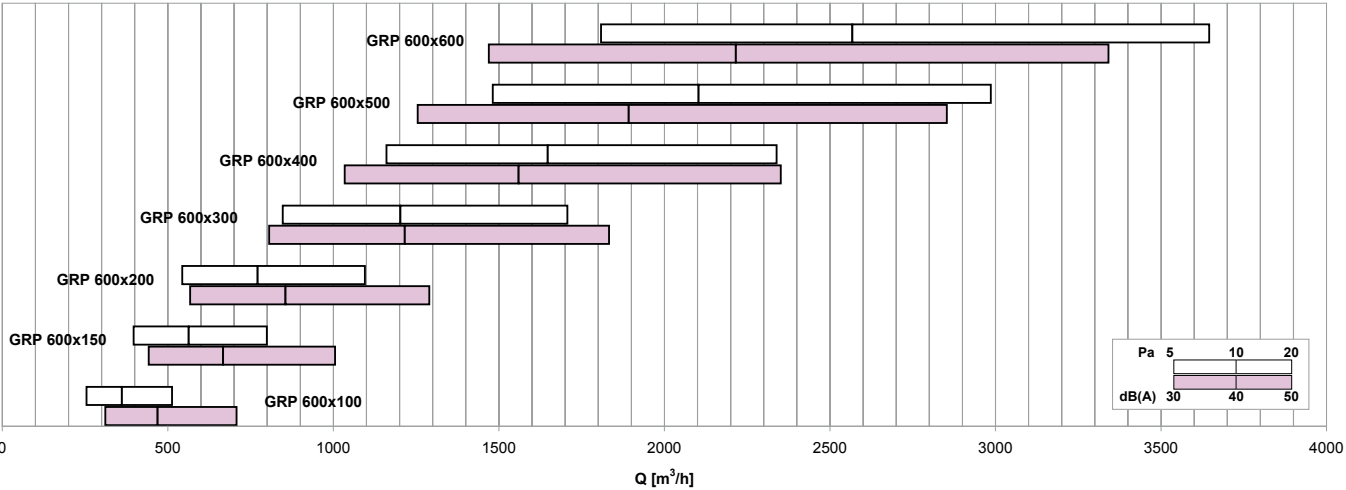


TABELLA DI SELEZIONE / SELECTION TABLE

Modello Model	A _s [m²]	Q [m³/h]		L _{WA} [dB(A)]		Y (0,25) [m]		Dp, [Pa]	
		min	max	min	max	min	max	min	max
GRP 300x100	0,0126	120	240	21	38	2,2	4,9	5	20
GRP 400x100	0,0172	160	330	22	40	2,6	5,9	5	20
GRP 500x100	0,0220	210	420	24	41	3,2	6,7	5	20
GRP 600x100	0,0268	250	510	25	42	3,5	7,4	5	20
GRP 800x100	0,0368	350	700	27	44	4,2	8,8	5	20
GRP 1000x100	0,0470	450	900	28	45	4,9	10,0	5	20
GRP 300x150	0,0196	190	370	24	40	3,1	6,3	5	20
GRP 400x150	0,0268	250	510	25	42	3,5	7,6	5	20
GRP 500x150	0,0343	320	650	26	43	4,1	8,6	5	20
GRP 600x150	0,0418	400	800	28	44	4,7	9,6	5	20
GRP 800x150	0,0573	540	1100	29	46	5,4	11,3	5	20
GRP 1000x150	0,0732	690	1400	30	47	6,2	12,7	5	20
GRP 400x200	0,0368	350	700	27	44	4,4	9,1	5	20
GRP 500x200	0,0470	450	900	28	45	5,0	10,3	5	20
GRP 600x200	0,0573	540	1100	29	46	5,5	11,4	5	20
GRP 800x200	0,0785	740	1500	30	48	6,5	13,3	5	20
GRP 1000x200	0,1003	950	1920	32	49	7,4	15,1	5	20
GRP 500x300	0,0732	690	1400	30	47	6,4	13,1	5	20
GRP 600x300	0,0893	850	1710	31	48	7,1	14,5	5	20
GRP 800x300	0,1224	1160	2340	33	50	8,3	16,9	5	20
GRP 1000x300	0,1563	1480	2990	34	51	9,4	19,1	5	20
GRP 600x400	0,1224	1160	2340	33	50	8,4	17,1	5	20
GRP 800x400	0,1677	1590	3200	34	51	9,8	20,0	5	20
GRP 1000x400	0,2141	2030	4090	36	53	11,1	22,5	5	20
GRP 600x500	0,1563	1480	2990	34	51	9,6	19,5	5	20
GRP 800x500	0,2141	2030	4090	36	53	11,2	22,7	5	20
GRP 1000x500	0,2733	2590	5220	37	54	12,6	25,6	5	20
GRP 600x600	0,1908	1810	3650	35	52	10,7	21,7	5	20
GRP 800x600	0,2613	2480	5000	37	54	12,5	25,3	5	20
GRP 1000x600	0,3336	3160	6380	38	55	14,0	28,5	5	20