

USCATOARE CU TAMBUR

DX
GAMA

DX 11	DX 13	DX 16	DX 24
11KG 25 LIVRE	13KG 30 LIVRE	16KG 35 LIVRE	24KG 53 LIVRE



CARACTERISTICI

Comanda:

- Comanda duala digitala sau cu microprocesor OPL
- Versiune cu monede: XQ-Control

Incalzire electrica, cu gaz sau cu abur

Deschidere mare a usii pentru incarcare si descarcare usoara a rufelor (Ø 57cm DX11,13,16, Ø 68cm DX24)

Tambur galvanizat

Circulatie axiala a aerului

Filtru de scame mare

OPTIUNI

Tambur din otel inoxidabil

Panou frontal din otel inoxidabil si usa vopsita in negru

Versiune cu dispozitiv pentru monede

Tambur cu miscare reversibila

Controlul umiditatii reziduale, sistem Sensodry+® (numai cu microprocesor Full OPL):

- costuri reduse la energie si utilitati
- costuri reduse la inlocuirea lenjeriei

Sistem de stingerea incendiului SafeTech™



USCARE
RAPIDA



USOR DE
UTILIZAT




USOR DE
REPARAT

senso.dry+


SafeTech™

TIP USCATOR		DX11	DX13	DX16	DX24
CAPACITATE					
Capacitate	kg	11	13	16	24
Volum tambur	l	220	270	350	490
Diametru tambur	mm	Ø 673	Ø 673	Ø 762	Ø 838
DEBIT AER					
Debit aer	l/s	240	240	280	330
MEDIA DE USCARE					
Incalzire cu gaz	g/min	226	267	349	485
Incalzire electrica	g/min	172	258	340	371
MOTOR					
Ventilator	kW	0,4	0,4	0,4	0,4
Actionare	kW	0,2	0,2	0,2	0,4
INCALZIRE CU GAZ					
Energie	kW	18,8	21,4	26,4	32,8
Energie	kBTU/h	64	73	90	112
Racord electric		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz			
Racord gaz	NPT	½"	½"	½"	½"
INCALZIRE CU ABUR					
Presiune inalta 6,9 bar	kW	24,47	24,47	30,3	-
	kBTU/h	83,5	83,5	103,4	-
Racord electric		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz			
Racord abur	NPT	¾"	¾"	¾"	-
INCALZIRE ELECTRICA					
Energie (putere)	kW	12	21	24	27
Racord electric		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz			
RACORD EVACUARE AER	Ø /mm	150	150	200	200
DIMENSIUNI					
Gabarit HxLxA	mm	1625×710×1000	1625×710×1155	1625×800×1155	1700×925×1350
Greutate neta (E)	kg	140	150	160	200
Greutate neta (G,S)	kg	135	145	155	195
DATE DE TRANSPORT					
Ambalaj (folie) HxLxA	mm	1720×760×1090	1720×760×1240	1720×840×1240	1790×900×1450
Greutate bruta (folie, E)	kg	150	160	170	220
Greutate bruta (folie,G,S)	kg	145	155	165	215
Ambalaj (cutie) HxLxA	mm	2210×880×1170	2210×880×1320	2210×950×1320	2210×1020×1520
Greutate bruta (cutie, E)	kg	210	220	230	300
Greutate bruta (cutie,G,S)	kg	205	214	220	295

Vedere din lateral DX 11 13 16 24

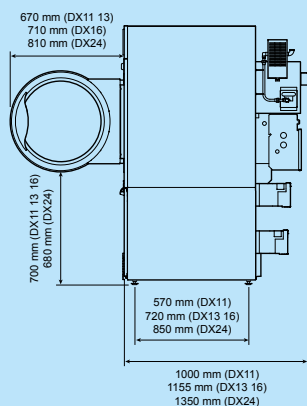

Vedere din spate DX 11 13 16 24

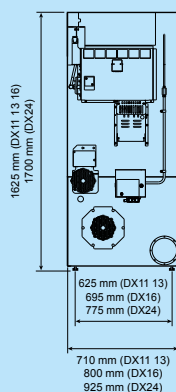

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

